




Sani Panel




Sani Panel

Dimensions

SPAW _Sani Panel Wall

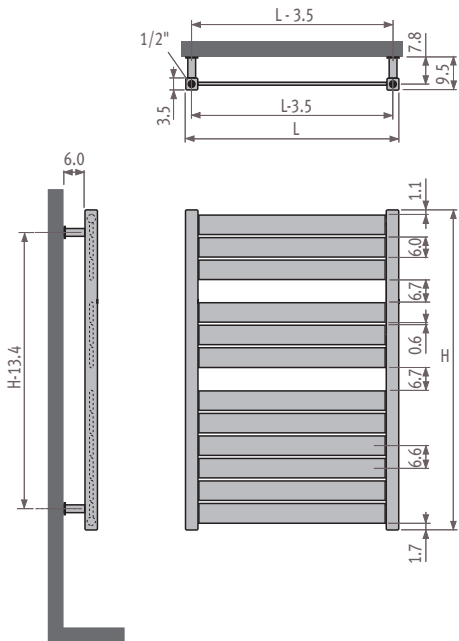


Range

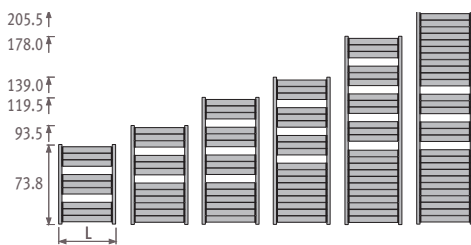

Connections

Code: 1° number = flow
2° number = return



Standard connection

Code 18
Connection 18 or 81

Top end connection

Ordering code specify 45 or 54 instead of 18. Insert pipe included without surcharge, to be mounted in the return, provide an air vent on the central heating tube. No surcharge.

Side end connection


Ordering code specify 32, 67, 41 or 58 instead of 18, no surcharge.

Single point connection

Ordering code: specify code 11 or 88 instead of 18. In case of single point connection always use a diffusion tube of min. length of 100 mm (\varnothing 10 up to 12 mm) with a reduction washer. Not possible with a radiator on feet.

With electric element


Ordering code: standard code 18, and order an electric element. Not possible with a radiator on feet.



Mixed

Ordering code: standard code 18. Order an electric element and T-pieces.


- Fit the T-piece together with the electrical heating element for connection to the central heating wet system.
- Never isolate the radiator from the expansion system, in other words never cut off the return of the radiator. Not possible with a radiator on feet.



Not standard connection without surcharge.


Fixings

Standard wall fixing




Ceiling fixing


The ceiling fixing is identical to the feet. It has however a length of 50 cm which can be adapted by the contractor on site.



Feet




Side end fixing



Configurations on size: see parts.

Outputs



Standard delivery

- connection 18 underneath
- wall fixing
- chrome-plated air vent and drain cock

Standard colours:

- white (233) RAL 9016 glossy
- white (201) RAL 9010 glossy
- sandblast grey metallic (001)

Sani Panel

code height length colour conn.
ORDERING CODE: SPAW. 073 040. XXX /18


| H | | L 040 | 050 | 060 | 070 | 080 | 100 |
|-----|----------|-------|------|------|------|------|------|
| 73 | 75/65/20 | 318 | 386 | 455 | 524 | 593 | 731 |
| | 90/70/20 | 403 | 490 | 578 | 666 | 754 | 931 |
| 93 | 75/65/20 | 414 | 503 | 593 | 683 | 772 | 951 |
| | 90/70/20 | 524 | 637 | 752 | 867 | 981 | 1209 |
| 119 | 75/65/20 | 506 | 615 | 724 | 833 | 942 | 1160 |
| | 90/70/20 | 640 | 779 | 917 | 1056 | 1195 | 1473 |
| 139 | 75/65/20 | 594 | 721 | 848 | 975 | 1102 | 1356 |
| | 90/70/20 | 750 | 912 | 1073 | 1235 | 1396 | 1719 |
| 178 | 75/65/20 | 732 | 887 | 1041 | 1196 | 1351 | 1660 |
| | 90/70/20 | 923 | 1120 | 1315 | 1512 | 1708 | 2101 |
| 205 | 75/65/20 | 860 | 1039 | 1218 | 1397 | 1576 | 1934 |
| | 90/70/20 | 1083 | 1309 | 1536 | 1762 | 1989 | 2442 |

Surcharge for freestanding model SPAF

Description:

- 2 feet
- 2 ceiling fixings
- 3 chrome-plated T-pieces 1/2"
- 1 chrome-plated air vent 1/2"

Freestanding models available in heights 178 and 205 cm.



Ex. SPAF. 178 040. XXX/18

CODE

st. colour

other


Code SPAF
instead of SPAW

Surcharge for positioning perpendicular to the wall SPAS

Description:

- 2 side end fixings
- 1 foot
- 1 chrome-plated air vent 1/2"

Surcharge for positioning perpendicular to the wall available in heights 178 and 205 cm.

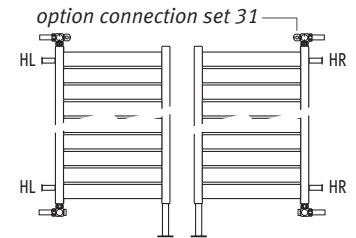

Ex. SPAS. 178 040. XXX/41/HL

Ex. SPAS. 178 040. XXX/58/HR

CODE

st. colour

other


Code SPAS
instead of SPAW



Output measured in accordance with EN442, at a water temperature of 75/65 and a room temperature of 20°C ($\Delta T=50$).


Options

Electro heating



| CODE | WATTS | L |
|---------|-------|------|
| 9096.10 | 450 | 31.5 |
| 9096.11 | 600 | 35.5 |
| 9096.12 | 900 | 51.5 |
| 9096.13 | 1200 | 66.0 |
| 9096.14 | 1500 | 82.0 |


Electro heating element with infra-red operation



- Finish: white ABS
- Transmission range: ± 6 m in all directions
 - Receiver has to be placed at the back of the radiator
 - Insulation Class 1

| CODE | WATTS | L |
|----------|-------|----|
| 9096.510 | 600 | 47 |
| 9096.520 | 900 | 68 |

Electric element Eco Comfort




| CODE | WATTS | L |
|---------|-------|------|
| 9096.70 | 600 | 55.0 |
| 9096.71 | 750 | 60.0 |
| 9096.72 | 900 | 69.5 |
| 9096.73 | 1000 | 72.0 |
| 9096.74 | 1250 | 85.0 |
| 9096.75 | 1500 | 96.5 |

Connection electric element

- Fit the electric heating element vertically in the socket 1 or 8. The pressure release valve which is included should be fitted into socket 4 or 5, (3 bar).
- Do not switch the radiator on before filling it completely with water.
- Top up with water after the first total heating up of the radiator.


For more information see *Technical info*.

T-piece for mixed application




T-piece

Combination possibilities with T-piece

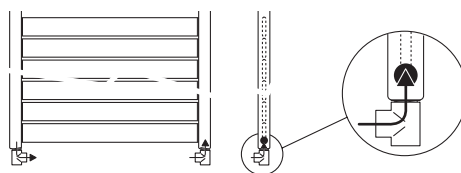


Connection at side or the back with a standard radiator

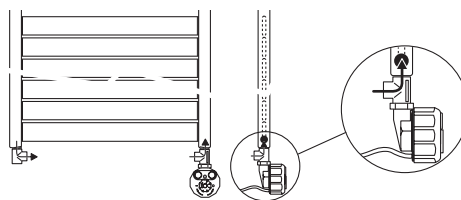

Mixed connection

| CODE | colour |
|----------------------------|---------------|
| TPCE.004.009 | chrome |
| TPCE.004.XXX | 201 up to 233 |
| | 301 up to 333 |
| <i>fill in colour code</i> | |

Insert pipe for top end connection



Will be delivered without surcharge if the top end connection code is indicated 45 or 54 instead of 18.

| CODE | H radiator | L |
|-----------|------------|-----|
| 9097.0540 | 73 | 54 |
| 9097.0840 | 93 | 84 |
| 9097.1100 | 119 | 110 |
| 9097.1280 | 139 | 128 |
| 9097.1660 | 178 | 166 |
| 9097.1960 | 205 | 196 |

